



FIG. 2A

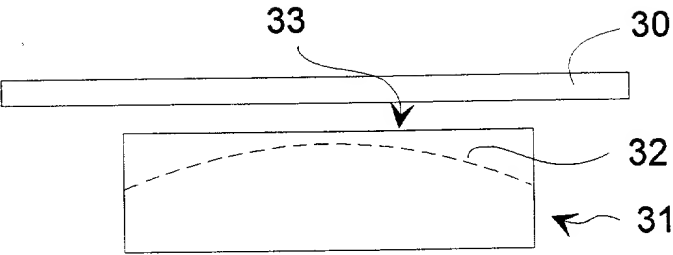


FIG. 2B

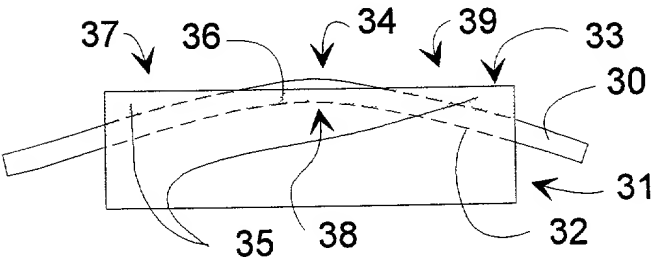


FIG. 2C

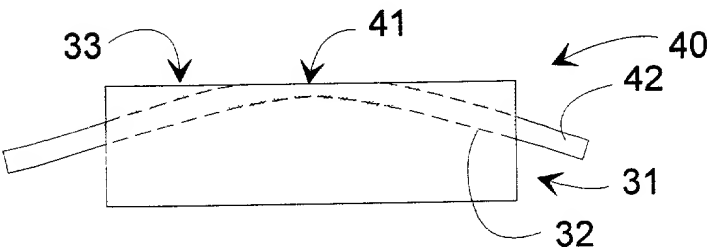


FIG. 2D

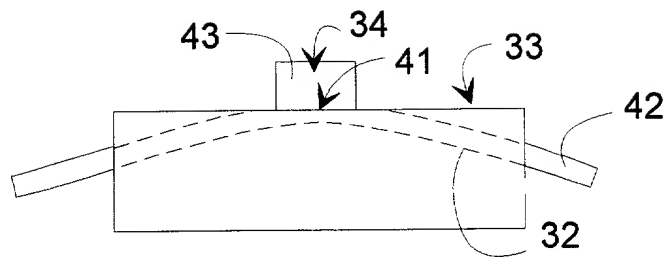


FIG. 2E

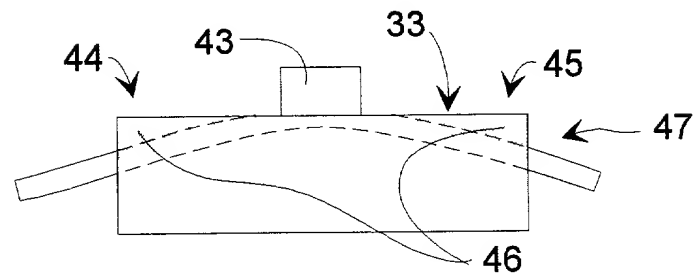


FIG. 2F

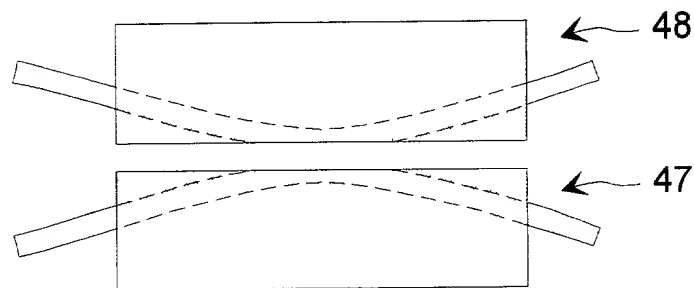




FIG. 2G

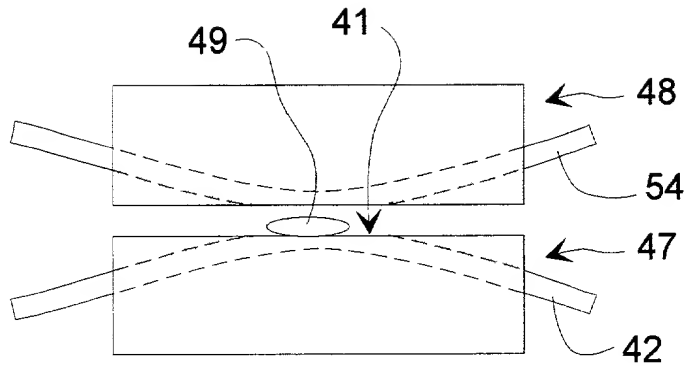


FIG. 2H

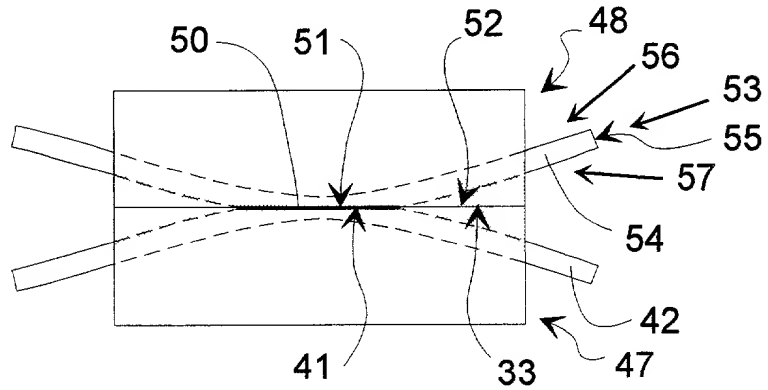


FIG. 2I



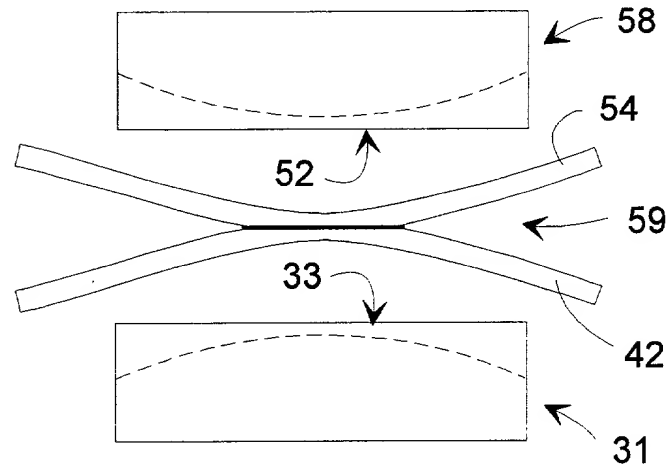


FIG. 2G: A cross-sectional view of a device assembly. It shows two rectangular blocks, 49 (top) and 42 (bottom), separated by a gap. A dashed line 41 represents a curved surface within the gap. Two angled plates, 54 (top) and 47 (bottom), are positioned on either side of the gap. Arrows 48 and 47 point towards the center of the gap.



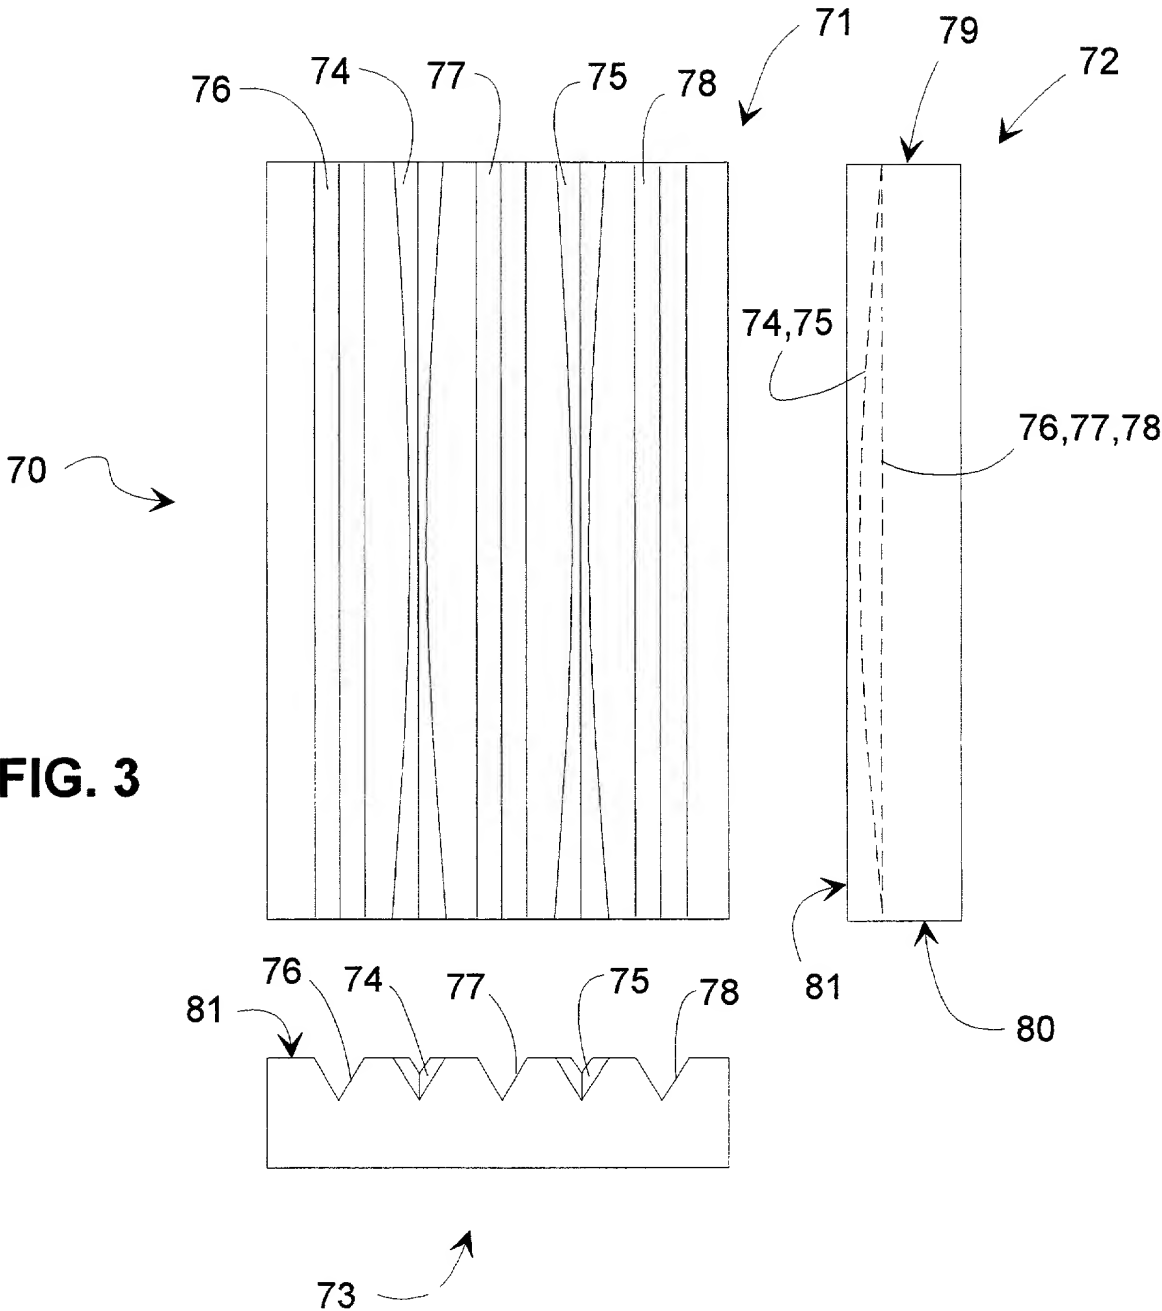

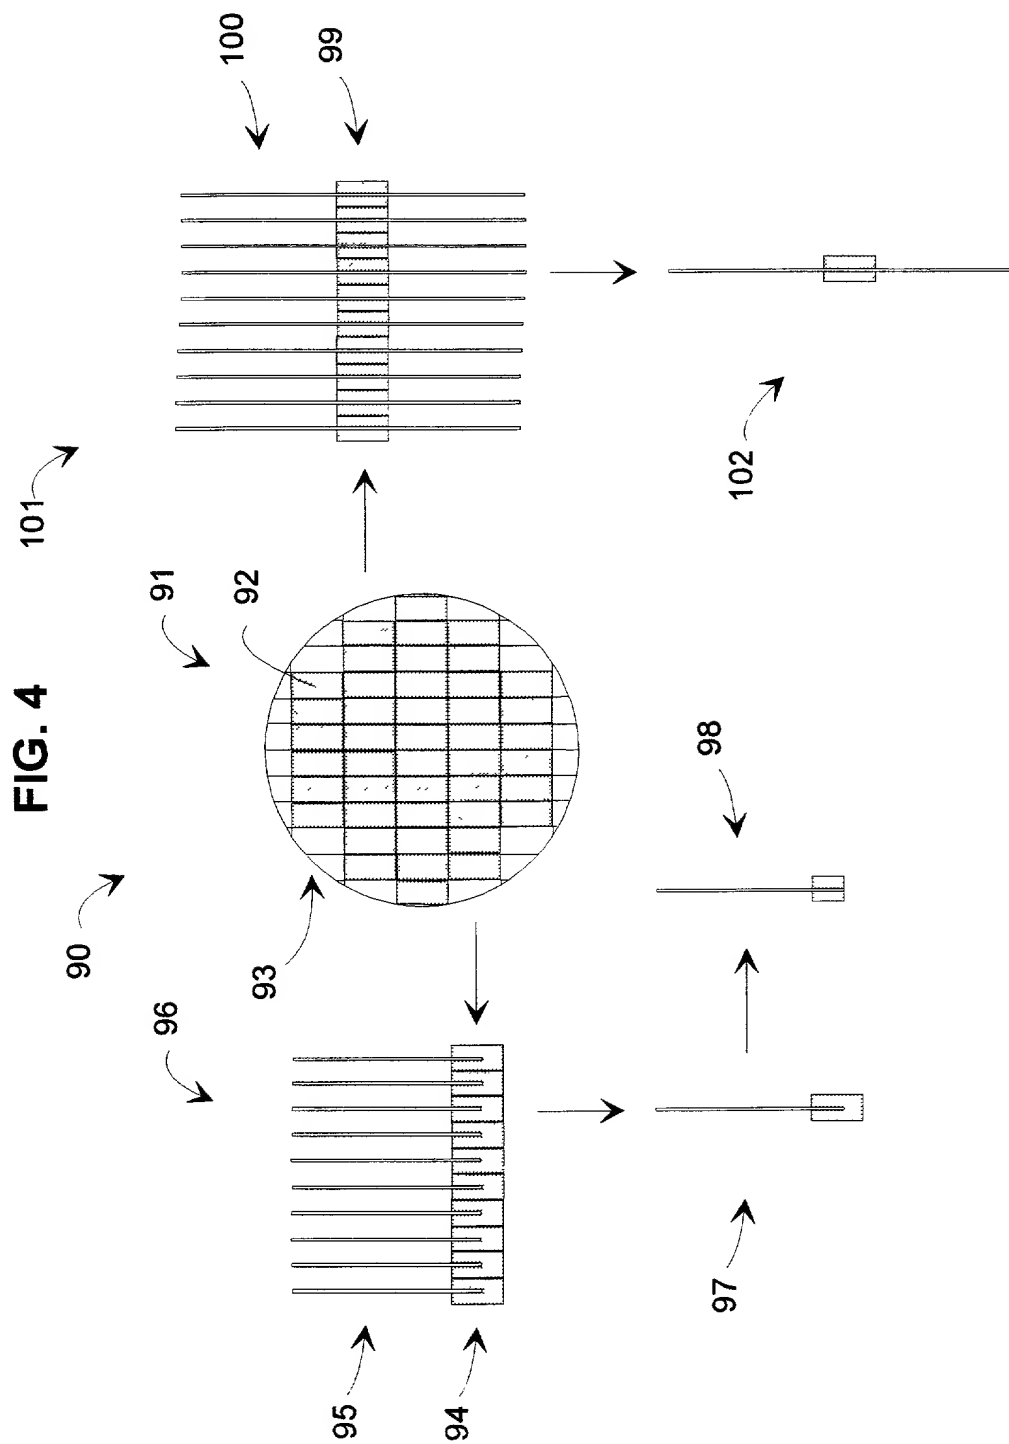

+

+

FIG. 5

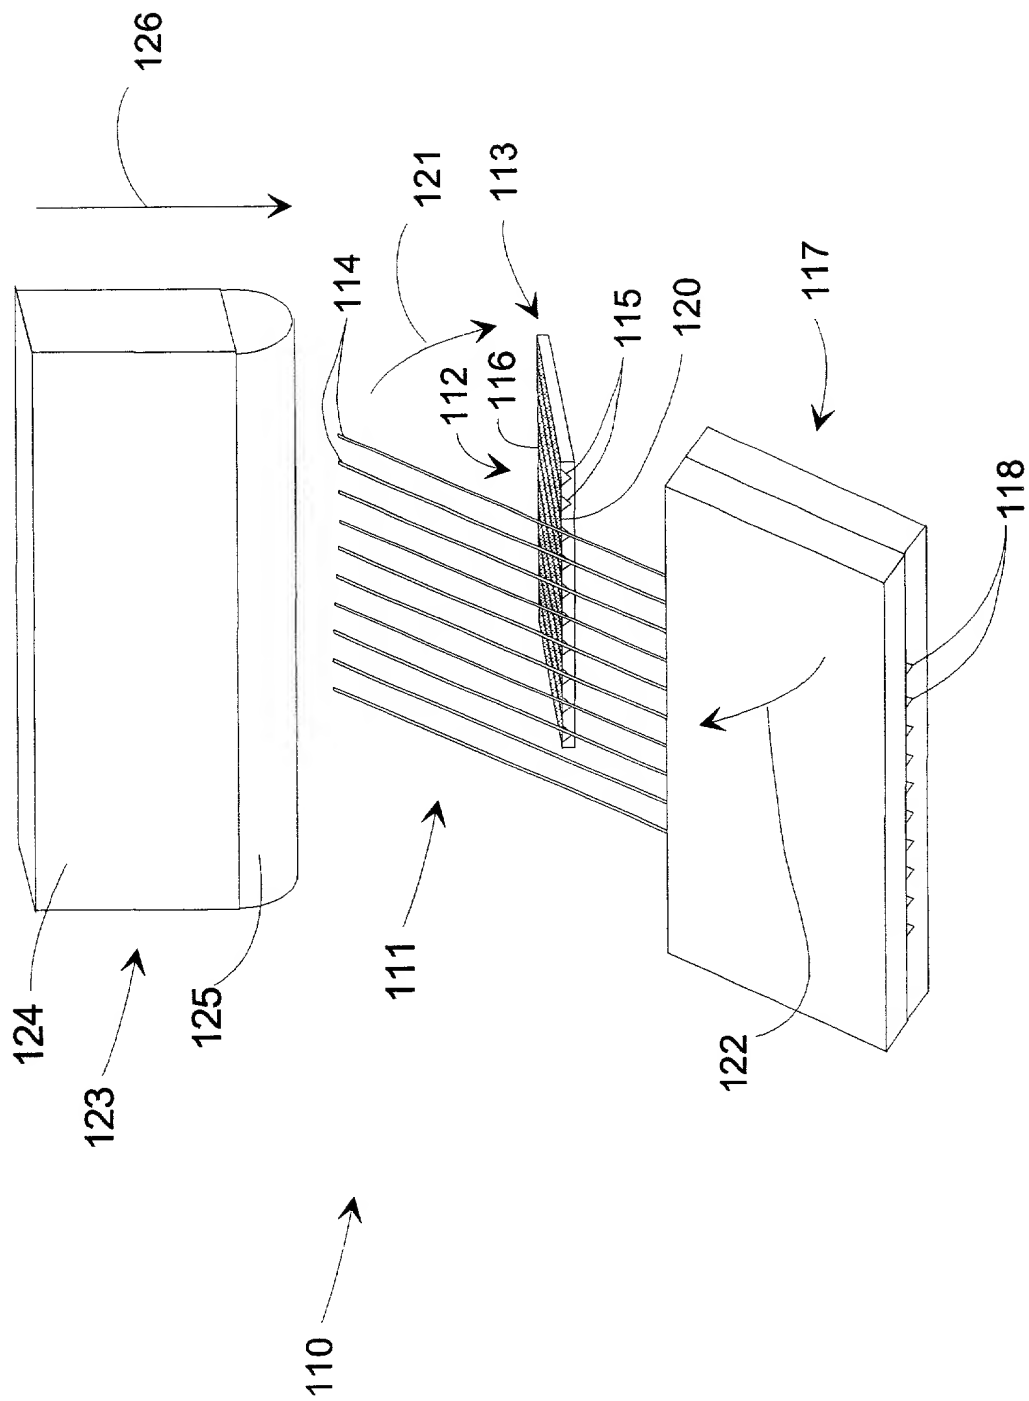


FIG. 6

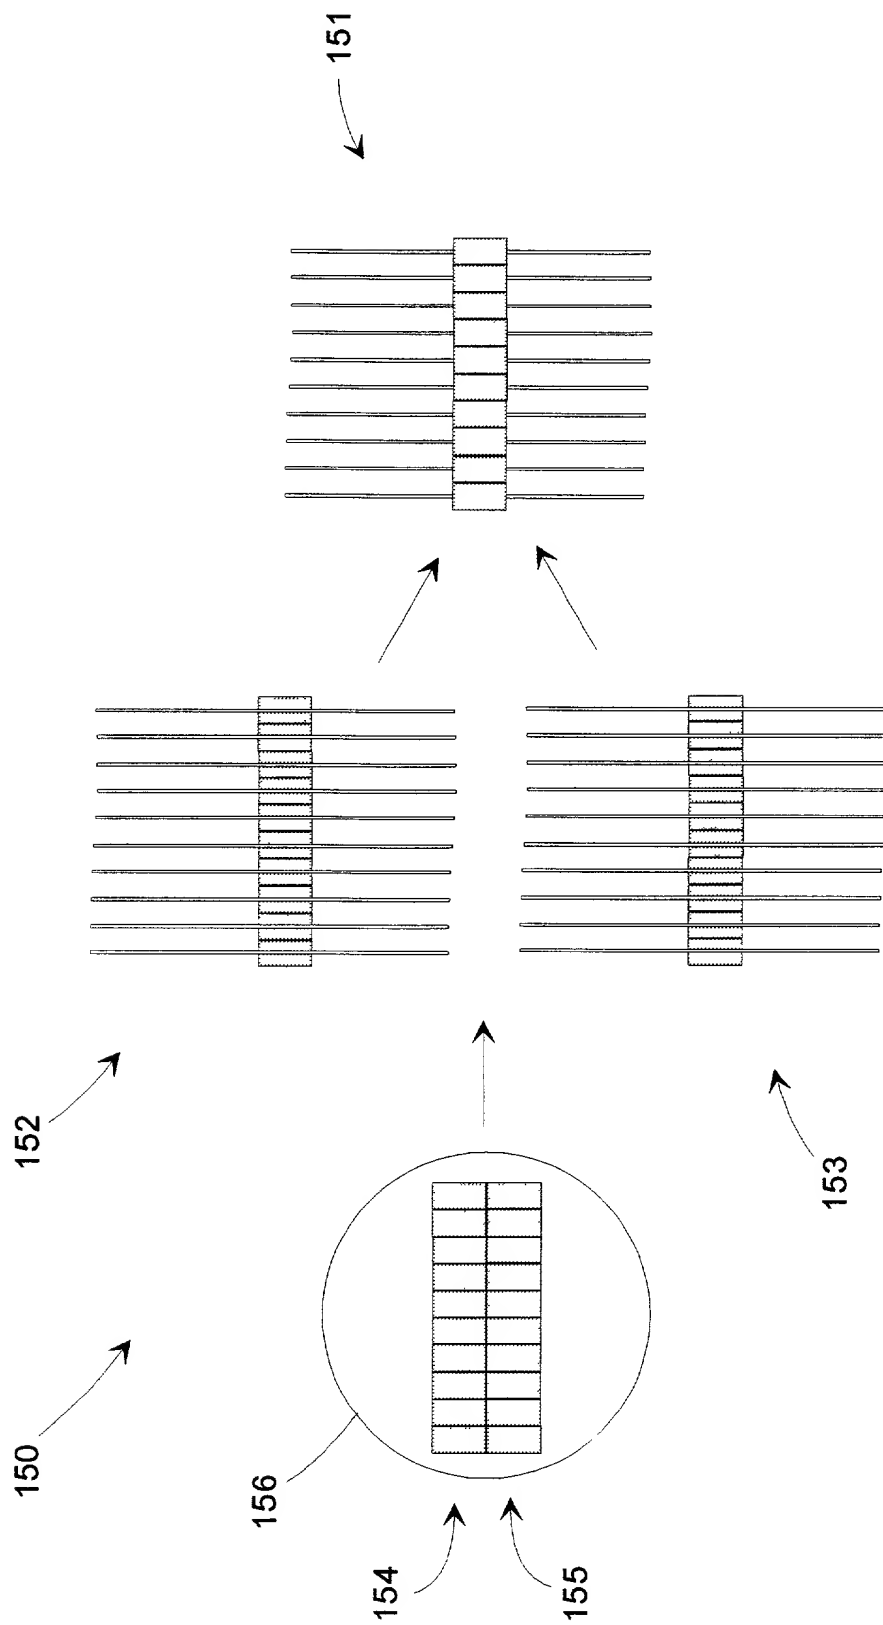


FIG. 7

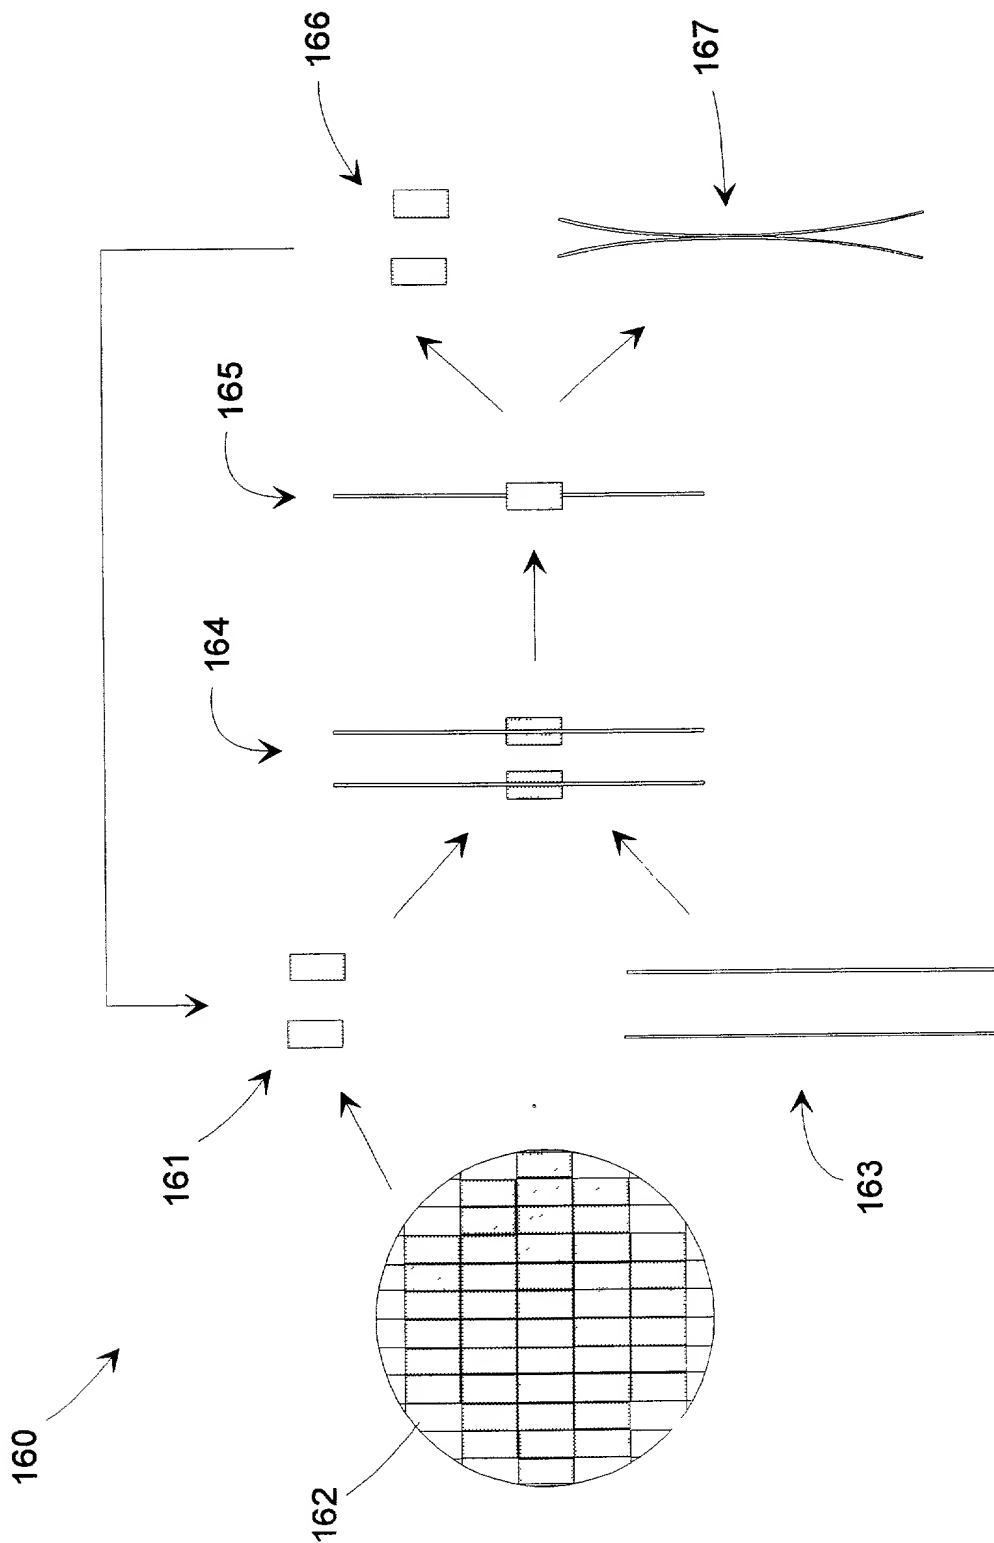


FIG. 8

